



Flush Casement Window



Lignum timber flush sash casement windows offer a classic design that suits any property style. A popular choice for replacing traditional windows, the flush sash frame can also be paired with contemporary glazing bars and hardware for house remodeling projects or new builds.

Externally, the outerframe and sash are flush and feature slim sightlines to provide a larger glass area. The window system is internally beaded to enhance security, is certified to PAS 24:2016 and has achieved Secured by Design accreditation.

The Lignum Flush Casement Window is A rated for energy efficiency and has a U-Value of 1.3 W/m²K with a warm edge Low-E argon filled double-glazed unit. U-Values of 1.0 W/m²K or below can be achieved with triple-glazing.



PAS 24:2016 Security



Secured by Design System



Document Q Compliant



Document L Compliant



Document M Compliant



BS6375-1 2009 Weather Tightness



Double or Triple Glazing

Specification

Frame Options	95mm x 57mm Head & Jamb, 68mm x 57mm Cill 93mm x 68mm & 93 x 90mm 93mm x 68mm Transom & Mullion
Sash	64 x 57mm Top Rail & Stiles 67 x 57mm Bottom Rail 57 x 57mm Rail Option NON PAS24
Sash Profile	Ovolo or Lambs Tongue
Cill Projection	Flush 35mm, 60mm, 85mm or 100mm
Glazing	24mm Low E Sealed Unit (4mm/16mm/4mm) Warm Edge Spacer, Obscure, Sound Control, Toughened & Laminated Options Available Argon Filled Cavity. Outer perimeter has Standard Warm Edge Spacer, Colour Black, Optional White, Security Bead Glazing System Additional Glazing Units 12mm & 14mm Options Curved Glass and Units with less than 14mm cavity will have Aluminium spacer in place of warm edge spacer
Trickle Vent	Concealed Trickle Vents Through Head 4600EA

Hardware/Fittings

Hardware	Friction hinges for side and top swing sashes. Multipoint locking system.
Handles	Handles Polished Chrome, Satin Chrome, Antique Brass, Oil Rubbed Bronze, Brass Finish
Trickle Vent	Can be fitted through head (Head Drip)


Test Data

BS6375 Part 1	Air Permeability Class 4, Watertightness Class 4 Resistance To Wind Load Class C5
Acoustic Rating	RW(C;Ctr) = 36 (-2,6) db (With Sound Control Glass)
Thermal Rating	1.3 W/m ² K (with double glazing) WER A or A+
Security	PAS 24 and Secured by Design






Flush Casement Windows

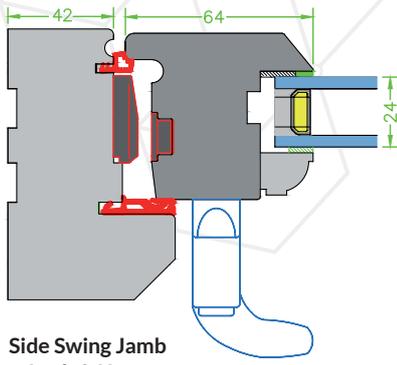


Side Swing Jamb
Lock & Keep

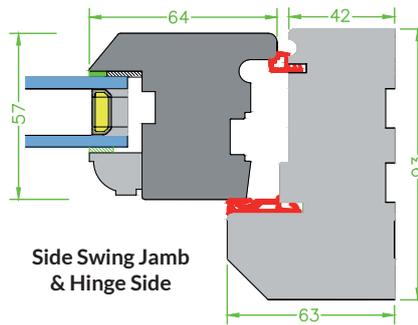


Side Swing Jamb
& Hinge Side


Glazing Bar Options



Lambs Tongue



Ovolo

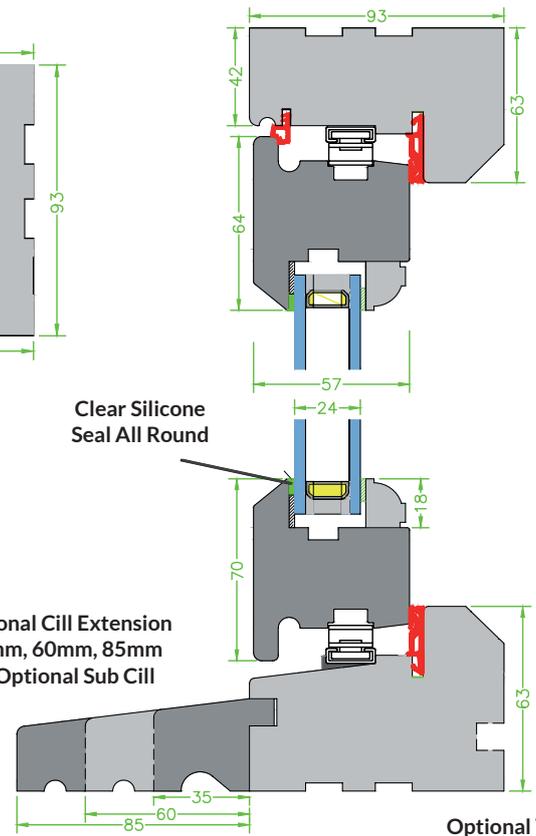

Optional Cill Extension
35mm, 60mm, 85mm
or Optional Sub Cill

Side Swing Cill & Hinge

Optional Window
Board Groove

DUE TO CONTINUED DEVELOPMENT THE JOINERY NETWORK AND JF JOINERY RESERVE THE RIGHT TO MODIFY OR CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE. THIS DRAWING & SPECIFICATIONS ARE THE PROPERTY OF THE JOINERY NETWORK. THEY ARE ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURING WITHOUT WRITTEN PERMISSION. ALL MEASUREMENTS ARE FINISHED DIMENSIONS IN MM. DO NOT SCALE DRAWING!

Design Features

- Secured by Design
- Tested to PAS 24:2016
- Internally Beaded for easy installation
- Deventer superior weatherseals
- Fully suited window & door system

Design Options

- Lambs Tongue or Ovolo glazing bars
- Friction-stay or traditional hinges (subject to Document Q requirements)
- Double or triple glazed
- Heritage slim-glass unit bead option
- Slim outerframe and sash options



Lignum Window & Door System Licensed Manufacturer

JF Joinery, Ridge View Workshops, North Molton, Devon, EX36 3HG

john@jfjoinery.co.uk | www.jfjwoodflooring.co.uk | 01598 740197

The Joinery Network





LIGNUM
Timber Windows & Doors
Created by The Joinery Network

Single Door (Open Out)

Lignum timber entrance doors are available to open either outward or inwards.

This outward opening version is a popular option where there is limited space to open inwards, when used for mobility access or for rear doors.

The Document Q compliant door is energy efficient and highly secure. The door design is very flexible, allowing for various glass and solid panel combinations. This makes it easy to produce almost any style of door.

For wide entrances see the Lignum Double Door option.



PAS 24:2016
Security



Secured by Design
System



Document Q
Compliant



Document L
Compliant



Document M
Compliant



BS6375-1 2009
Weather Tightness



Double or Triple
Glazing

Specification

Frame Options	93 x 57mm Head & Jambs 68 x 57mm Cill 93mm x 68mm & 93 x 90mm 93 x 68mm Transom * Mullion
Sash	94 x 57mm Top Rail & Stiles 185 x 57mm Bottom Rail 185 x 57mm Meeting Rails
Sash Profile	Ovolo or Lambs Tongue
Cill Projection	Flush 35mm, 60mm, 85mm or 110mm
Glazing	24mm Low E Sealed Unit (4mm/16mm/4mm) Obscure, Sound Control, Toughened and Laminated Options Available Argon Filled Cavity Outer perimeter has Standard Warm Edge Spacer (Black) Optional White Security Bead Glazing System Additional glazing units include 12mm and 14mm options Curved glass and units with less than 14mm cavity will have Aluminium Spacer in place of Warm Edge Spacer
Trickle Vent	Concealed Trickle Vent Through Head 4600EA

Hardware/Fittings

Hardware	Butt hinges fixed pin, multipoint thunder bolt locking system 3 star security cylinder
Handles	Lever handles, finishes on request
Trickle Vent	Can be fitted through frame head (Head Drip)

Test Data

BS6375 Part 1	Air Permeability Class 4, Watertightness Class 6A Resistance To Wind Load Class C5
Acoustic Rating	RW(C;Ctr) = 36 (-2,6) db (With Sound Control Glass)
Thermal Rating	U-Value 1.4W/m ² K
Security	PAS 24 and Secured by Design

The Joinery Network







LIGNUM


Timber Windows & Doors

Created by The Joinery Network


Single Door (Open Out)

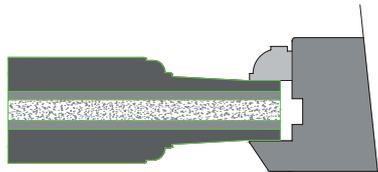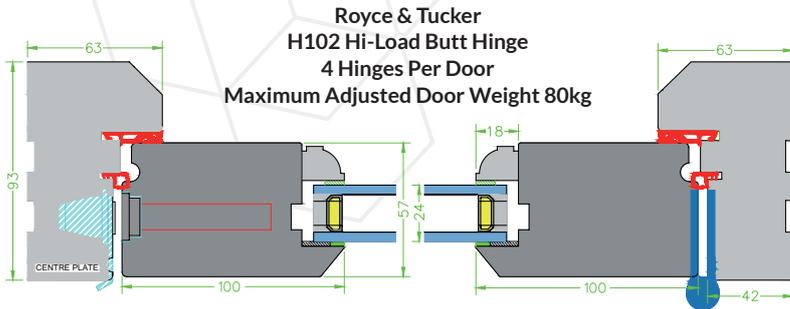


Flush Faced V grooved insulated panel

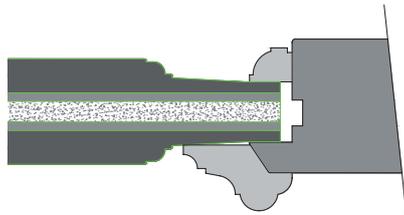

Raised and Fielded Insulated Panel
With Bolection Mouldings For
Improved Thermal Performance

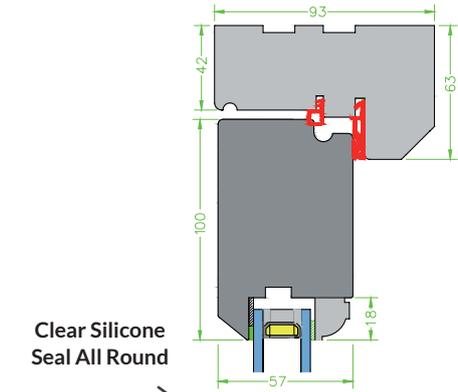

Clear Silicone Seal All Round

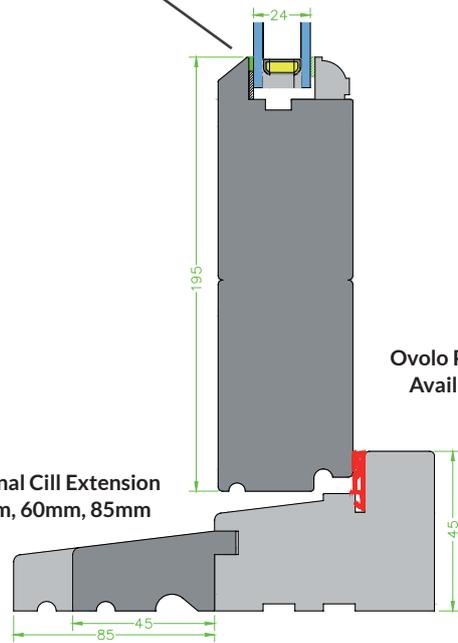

Optional Cill Extension
35mm, 60mm, 85mm

Ovolo Profile
Available

Now manufactured to
match inward opening
Cill with storm guard.

DUE TO CONTINUED DEVELOPMENT THE JOINERY NETWORK AND JF JOINERY RESERVE THE RIGHT TO MODIFY OR CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE. THIS DRAWING & SPECIFICATIONS ARE THE PROPERTY OF THE JOINERY NETWORK. THEY ARE ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURING WITHOUT WRITTEN PERMISSION. ALL MEASUREMENTS ARE FINISHED DIMENSIONS IN MM. DO NOT SCALE DRAWING!

Design Features

- Secured by Design
- Tested to PAS 24:2016
- Winkhaus Thunderbolt Multipoint Locking
- Internally Beaded for easy installation
- Deventer superior double weatherseals
- Hi load butt hinges
- Thermally enhanced door panels
- Fully suited window & door system



Design Options

- Lambs Tongue or Ovolo sash profile
- 57mm or 68mm wide outerframe
- Slim outerframe and sash options
- Heritage slim-glass unit bead option



Lignum Window & Door System Licensed Manufacturer

JF Joinery, Ridge View Workshops, North Molton, Devon, EX36 3HG

john@jfjoinery.co.uk | www.jfjwoodflooring.co.uk | 01598 740197

The Joinery Network





Single Door (Open In)

Lignum timber entrance doors are available to open either outward or inwards.

The Document Q compliant door is energy efficient and features high security multi-point locking.

The flexible inward opening design is suitable for main entrance, side or rear doors. It allows for various glass and solid panel combinations. This makes it easy to produce almost any style of door.

For wide entrances see the Lignum Double Door option.



**PAS 24:2016
Security**



**Secured by Design
System**



**Document Q
Compliant**



**Document L
Compliant**



**Document M
Compliant**



**BS6375-1 2009
Weather Tightness**



**Double or Triple
Glazing**

Specification

Frame Options	102 x 164mm Head & Jambs 68 x 164mm Cill 98mm, 141mm * 198mm Mullion 28mm Transom
Sash	56 x 57mm Top Rail & Stiles 90 x 57mm Bottom Rail 43 x 57mm Meeting Rails
Sash Profile	Ovolo or Lambs Tongue
Cill Projection	35mm Flush 60mm, 85mm or 110mm
Glazing	24mm Low E Sealed Unit (4mm/16mm/4mm) Obscure, Sound Control, Toughened and Laminated Options Available Argon Filled Cavity, Outer perimeter has Standard Warm Edge Spacer (Black) Optional White Security Bead Glazing System Additional glazing units include 12mm and 14mm options Curved glass and units with less than 14mm cavity will have Aluminium Spacer in place of Warm Edge Spacer
Trickle Vent	Concealed Trickle Vent Through Head 4600EA

Hardware/Fittings

Hardware	Sash catch, sash lifts, sash restrictors and barrel security lock 2 sash catches fitted if frames are PAS 24 security
Handles	Polished Chrome, Satin Chrome, Antique Brass, Oil Rubbed Bronze or Brass Finish
Trickle Vent	Can be fitted through head (Concealed)

Test Data

BS6375 Part 1	Air Permeability Class 3, Watertightness Class 8A to 450PA Resistance To Wind Load Class C5
Acoustic Rating	RW(C;Ctr) = 36 (-2,6) db (With Sound Control Glass)
Thermal Rating	U-Value 1.3W/m ² K
Security	PAS 24 and Secured by Design







LIGNUM

Timber Windows & Doors


Created by The Joinery Network

Single Door (Open In)

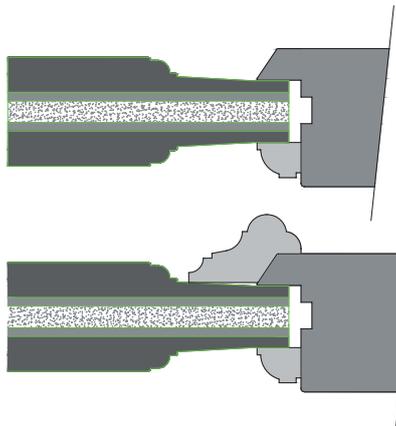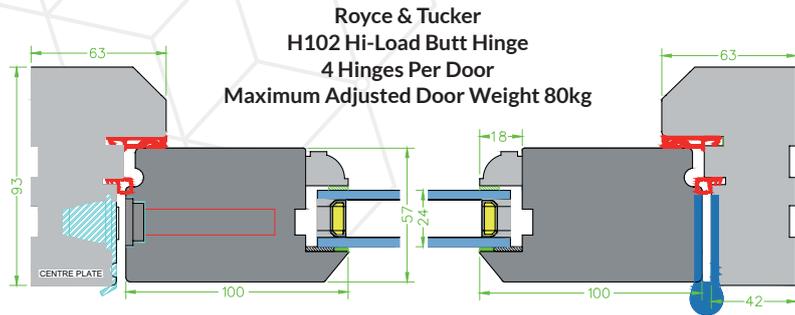

Flush faced insulated Panel with V Grooves

Raised and Fielded Insulated Panel With Bolection Mouldings For Improved Thermal Performance

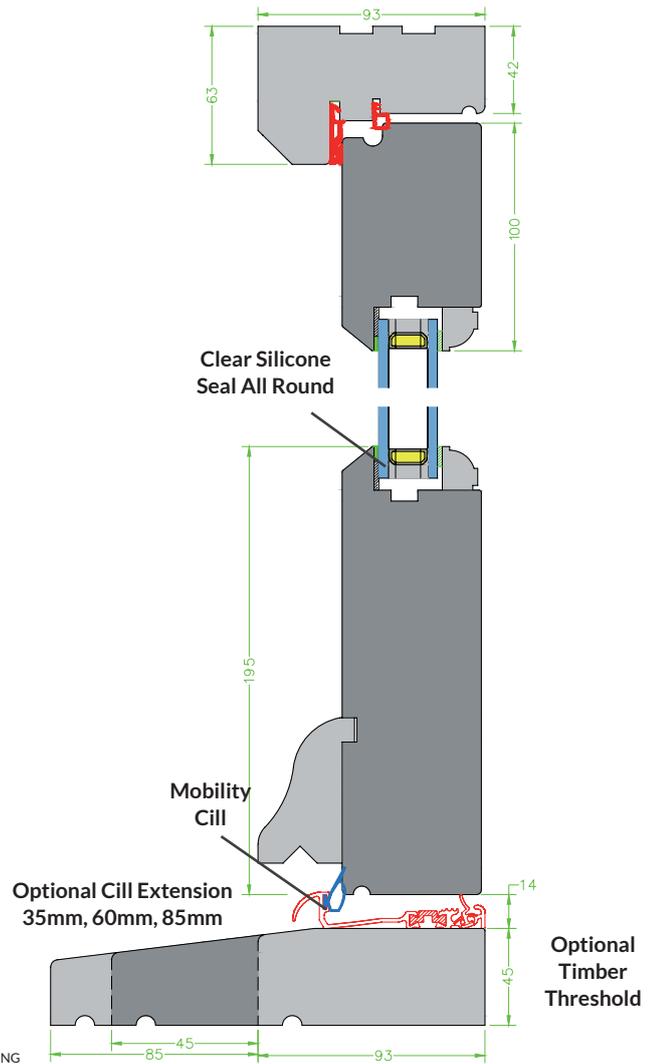

DUE TO CONTINUED DEVELOPMENT THE JOINERY NETWORK AND JF JOINERY RESERVE THE RIGHT TO MODIFY OR CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE. THIS DRAWING & SPECIFICATIONS ARE THE PROPERTY OF THE JOINERY NETWORK. THEY ARE ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURING WITHOUT WRITTEN PERMISSION. ALL MEASUREMENTS ARE FINISHED DIMENSIONS IN MM. DO NOT SCALE DRAWING!

Design Features

- Secured by Design
- Tested to PAS 24:2016
- Winkhaus Thunderbolt Multipoint Locking
- Internally Beaded for easy installation
- Deventer superior double weatherseals
- Hi load butt hinges
- Thermally enhanced door panels
- Fully suited window & door system



Design Options

- Lambs Tongue or Ovolo sash profile
- 57mm or 68mm wide outerframe
- Slim outerframe and sash options
- Heritage slim-glass unit bead option



Lignum Window & Door System Licensed Manufacturer

JF Joinery, Ridge View Workshops, North Molton, Devon, EX36 3HG

john@jfjoinery.co.uk | www.jfjwoodflooring.co.uk | 01598 740197

The Joinery Network





Double Doors (Open Out)

Lignum timber double doors are the classic French doorset, available as either outward or inward opening.

This outward opening version offers flexible design options for traditional, contemporary or modern styling. The doors are suitable for a range of threshold options including mobility access.

The double doors are energy efficient and PAS 24:2016 certified for high security. The system is also Secured by Design.



PAS 24:2016
Security



Secured by Design
System



Document Q
Compliant



Document L
Compliant



Document M
Compliant



BS6375-1 2009
Weather Tightness



Double or Triple
Glazing

Specification

Frame Options	93 x 57mm Head & Jambs 68 x 57mm Cill 93mm x 68mm & 93 x 90mm 93 x 68mm Transom * Mullion
Sash	94 x 57mm Top Rail & Stiles 185 x 57mm Bottom Rail 185 x 57mm Meeting Rails
Sash Profile	Ovolo or Lambs Tongue
Cill Projection	Flush 35mm, 60mm, 85mm or 110mm
Glazing	24mm Low E Sealed Unit (4mm/16mm/4mm) Obscure, Sound Control, Toughened and Laminated Options Available Argon Filled Cavity Outer perimeter has Standard Warm Edge Spacer (Black) Optional White Security Bead Glazing System Additional glazing units include 12mm and 14mm options Curved glass and units with less than 14mm cavity will have Aluminium Spacer in place of Warm Edge Spacer
Trickle Vent	Concealed Trickle Vent Through Head 4600EA

Hardware/Fittings

Hardware	Butt hinges fixed pin, multipoint thunder bolt locking system 3 star security cylinder
Handles	Lever handles, finishes on request
Trickle Vent	Can be fitted through frame head (Head Drip)

Test Data

BS6375 Part 1	Air Permeability Class 2 Watertightness Class 3A Resistance To Wind Load Class 800X
Acoustic Rating	RW(C;Ctr) = 36 (-2,6) db (With Sound Control Glass)
Thermal Rating	U-Value 1.4W/m ² K
Security	PAS 24 and Secured by Design






LIGNUM


Timber Windows & Doors

Created by The Joinery Network


Double Doors (Open Out)

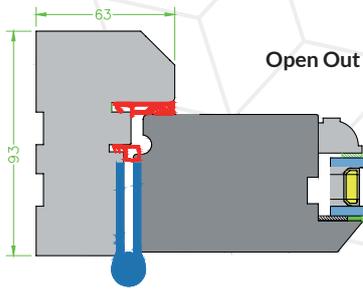


H101 Hi-Load Lift Off Hinge
4 Hinges Per Door
Maximum Adjusted Door Weight 80kg

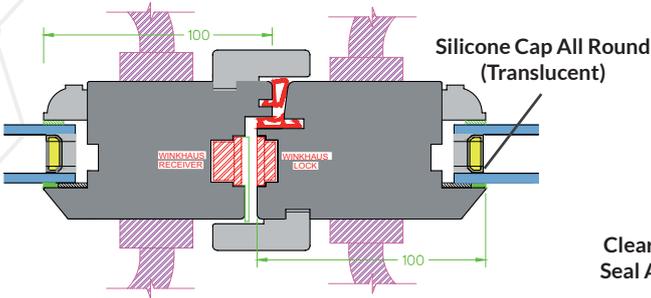


Master Door

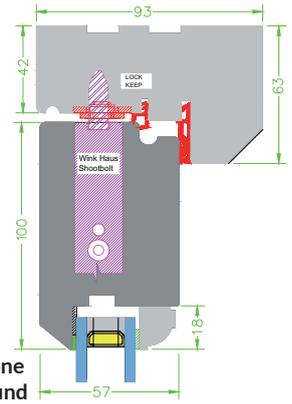

Clear Silicone Seal All Round

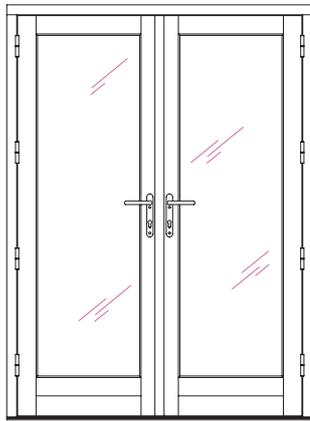

Optional Cill Extension
35mm, 60mm, 85mm

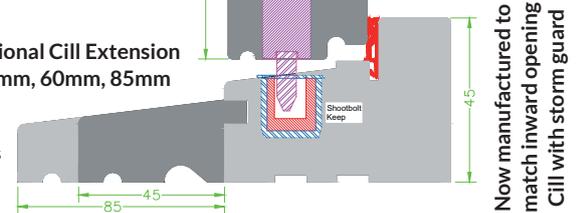

Now manufactured to match inward opening Cill with storm guard

DUE TO CONTINUED DEVELOPMENT THE JOINERY NETWORK AND JF JOINERY RESERVE THE RIGHT TO MODIFY OR CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE. THIS DRAWING & SPECIFICATIONS ARE THE PROPERTY OF THE JOINERY NETWORK. THEY ARE ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURING WITHOUT WRITTEN PERMISSION. ALL MEASUREMENTS ARE FINISHED DIMENSIONS IN MM. DO NOT SCALE DRAWING!

Design Features

- Secured by Design
- Tested to PAS 24:2016
- Winkhaus Thunderbolt Multipoint Locking
- Internally Beaded for easy installation
- Deventer superior double weatherseals
- Hi load butt hinges
- Thermally enhanced door panels
- Fully suited window & door system

Design Options

- Lambs Tongue or Ovolo sash profile
- 57mm or 68mm wide outerframe
- Slim outerframe and sash options
- Heritage slim-glass unit bead option



Lignum Window & Door System Licensed Manufacturer

JF Joinery, Ridge View Workshops, North Molton, Devon, EX36 3HG

john@jfjoinery.co.uk | www.jfjwoodflooring.co.uk | 01598 740197

The Joinery Network





Double Doors (Open In)

Lignum timber double doors are the classic French doorset, available as either outward or inward opening.

This inward opening version offers flexible design options for traditional, contemporary or modern styling. The doors are suitable for a range of threshold options, including mobility access.

The double doors are energy efficient and PAS 24:2016 certified for high security. The system is also Secured by Design.



PAS 24:2016
Security



Secured by Design
System



Document Q
Compliant



Document L
Compliant



Document M
Compliant



BS6375-1 2009
Weather Tightness



Double or Triple
Glazing

Specification

Frame Options	93 x 57mm Head & Jambs 68 x 57mm Cill 93mm x 68mm & 93 x 90mm 93 x 68mm Transom * Mullion
Sash	94 x 57mm Top Rail & Stiles 185 x 57mm Bottom Rail 185 x 57mm Meeting Rails
Sash Profile	Ovolo or Lambs Tongue
Cill Projection	Flush 35mm, 60mm, 85mm or 110mm
Glazing	24mm Low E Sealed Unit (4mm/16mm/4mm) Obscure, Sound Control, Toughened and Laminated Options Available Argon Filled Cavity Outer perimeter has Standard Warm Edge Spacer (Black) Optional White Security Bead Glazing System Additional glazing units include 12mm and 14mm options Curved glass and units with less than 14mm cavity will have Aluminium Spacer in place of Warm Edge Spacer
Trickle Vent	Concealed Trickle Vent Through Head 4600EA

Hardware/Fittings

Hardware	Butt hinges fixed pin, multipoint thunder bolt locking system 3 star security cylinder
Handles	Lever handles, finishes on request
Trickle Vent	Can be fitted through frame head (Head Drip)

Test Data

BS6375 Part 1	Air Permeability Class 2 Watertightness Class 3A Resistance To Wind Load Class 800X
Acoustic Rating	RW(C;Ctr) = 36 (-2,6) db (With Sound Control Glass)
Thermal Rating	U-Value 1.4W/m ² K
Security	PAS 24 and Secured by Design






LIGNUM

Timber Windows & Doors




Created by The Joinery Network

Double Doors (Open In)



H101 Hi-Load Lift Off Hinge
4 Hinges Per Door
Maximum Adjusted Door Weight 80kg

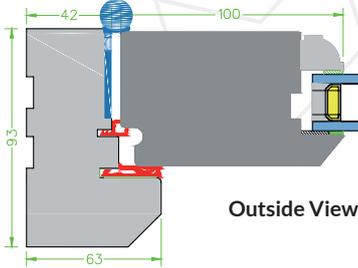

Outside View

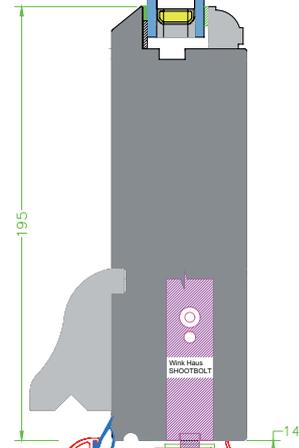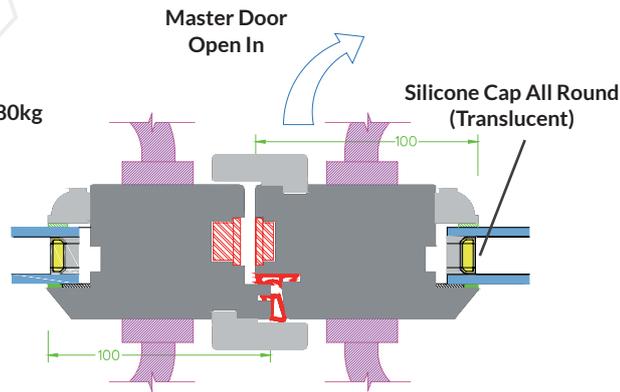

Optional Cill Extension and
Optional Timber Threshold

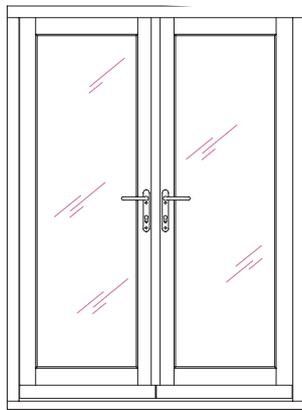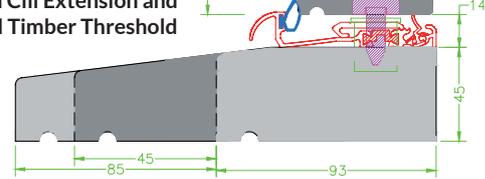

DUE TO CONTINUED DEVELOPMENT THE JOINERY NETWORK AND JF JOINERY RESERVE THE RIGHT TO MODIFY OR CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE. THIS DRAWING & SPECIFICATIONS ARE THE PROPERTY OF THE JOINERY NETWORK. THEY ARE ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURING WITHOUT WRITTEN PERMISSION. ALL MEASUREMENTS ARE FINISHED DIMENSIONS IN MM. DO NOT SCALE DRAWING!


Design Features

- Secured by Design
- Tested to PAS 24:2016
- Winkhaus Thunderbolt Multipoint Locking
- Internally Beaded for easy installation
- Deventer superior double weatherseals
- Hi load butt hinges
- Thermally enhanced door panels
- Fully suited window & door system



Design Options

- Lambs Tongue or Ovolo sash profile
- 57mm or 68mm wide outerframe
- Slim outerframe and sash options
- Heritage slim-glass unit bead option

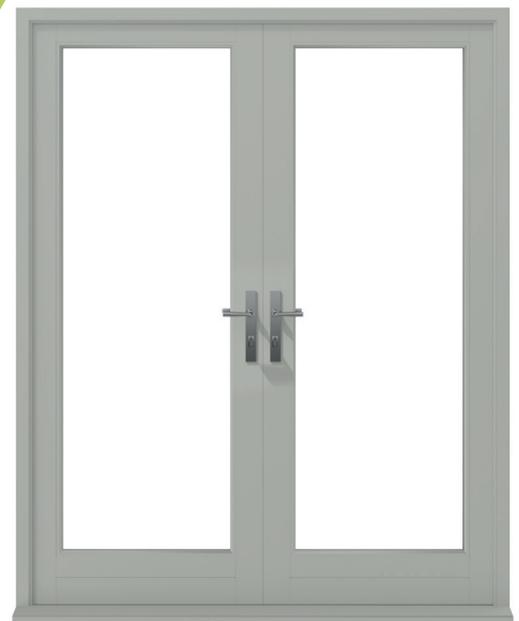

Lignum Window & Door System Licensed Manufacturer

JF Joinery, Ridge View Workshops, North Molton, Devon, EX36 3HG

john@jfjoinery.co.uk | www.jfjwoodflooring.co.uk | 01598 740197

The Joinery Network

